

TB 200 Conveyor Spec Sheet

Conveyors

Conveyor horizontal reach

Maximum at 0°	(61.00m)
Maximum at 30°	(53.20m)
Conveyor belt width	(610mm)
Feed conveyor length	(21.40m)
Feed conveyor belt width	(610mm)


Discharge height from grade

Maximum at 30°	(34.70m)
Maximum at -15°	(-11.40m)
Rated capacity at 0° main & feed conveyors	(7.65m ³ /min) (458m ³ /hr)
Rated capacity up to 20° main & feed conveyors	(4.81m ³ /min) (288m ³ /hr)

Outriggers


Outrigger spread F - R — front hydraulic extend out/down	(8.90m)
Outrigger spread L - R — rear hydraulic extend out/down	(8.30m)

Features: TB 200 Specification Drawing

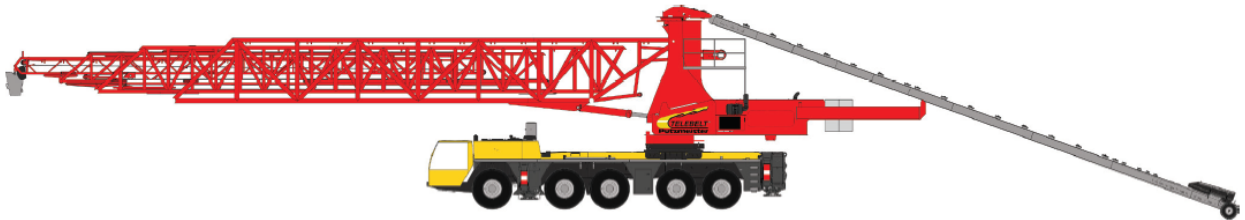


MINING

Features: TB 200 Operation Zone

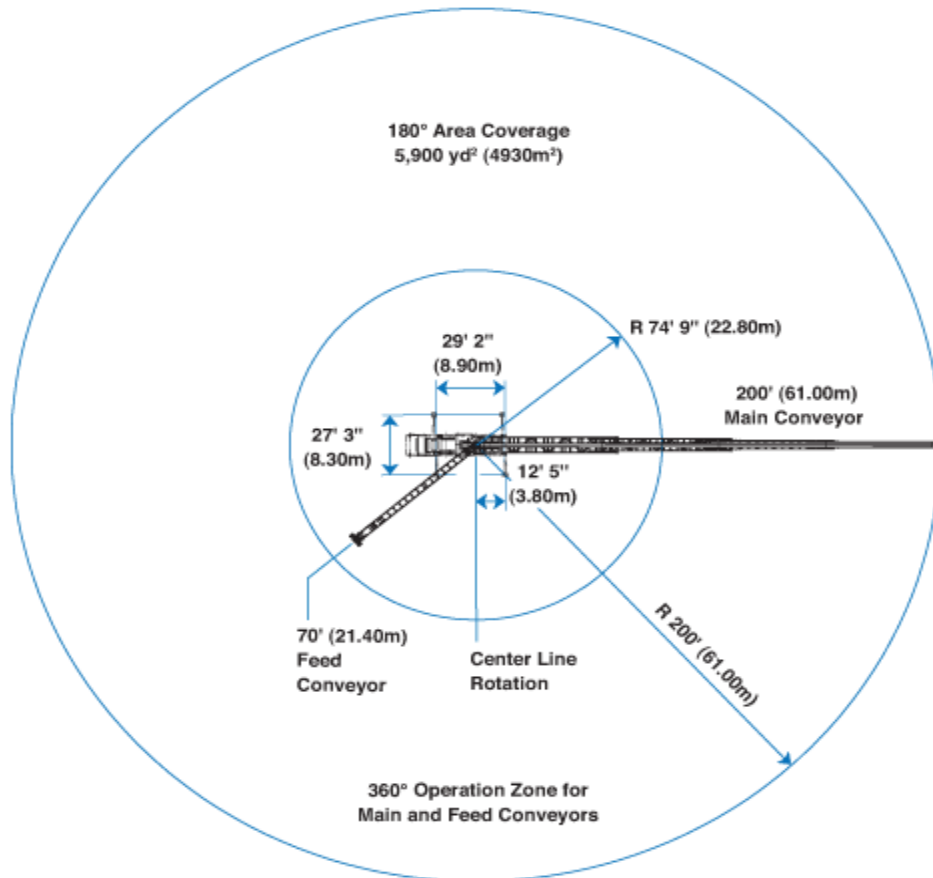

SHIPPING

Features: TB 200

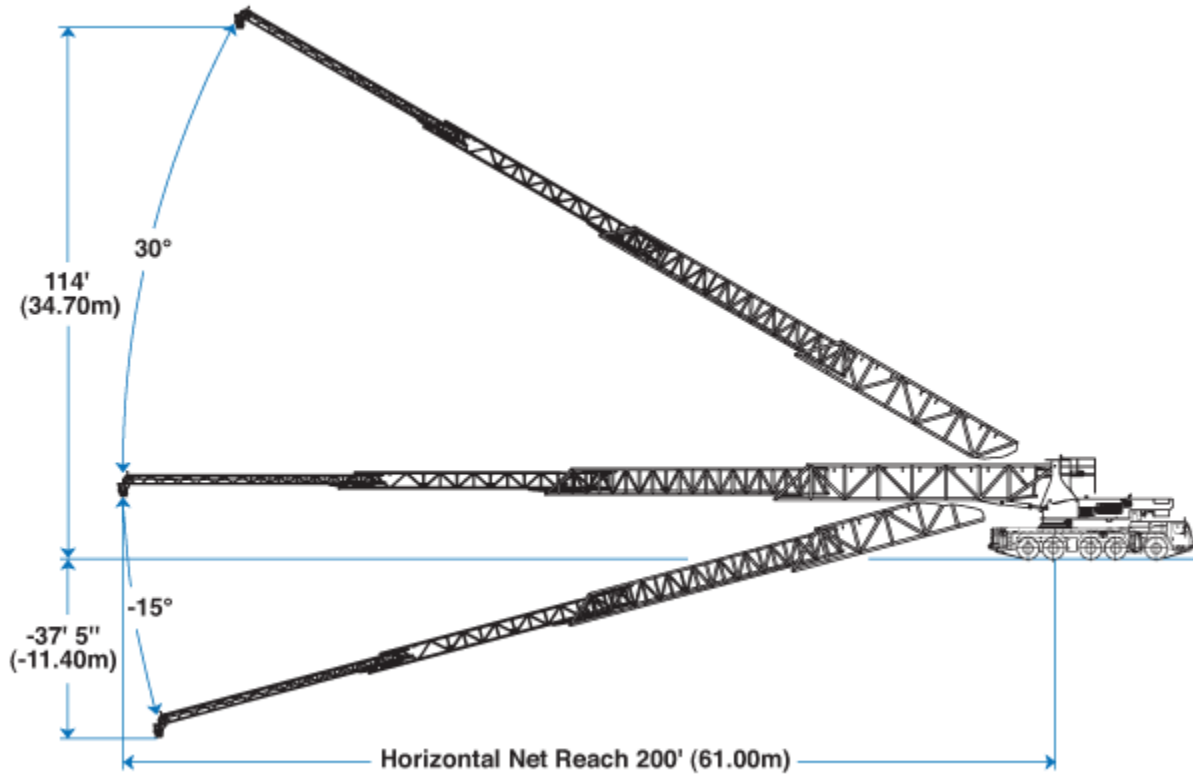

CONSTRUCTION